




UC-40/UCC-40

Mechanically Refrigerated Post-Mix

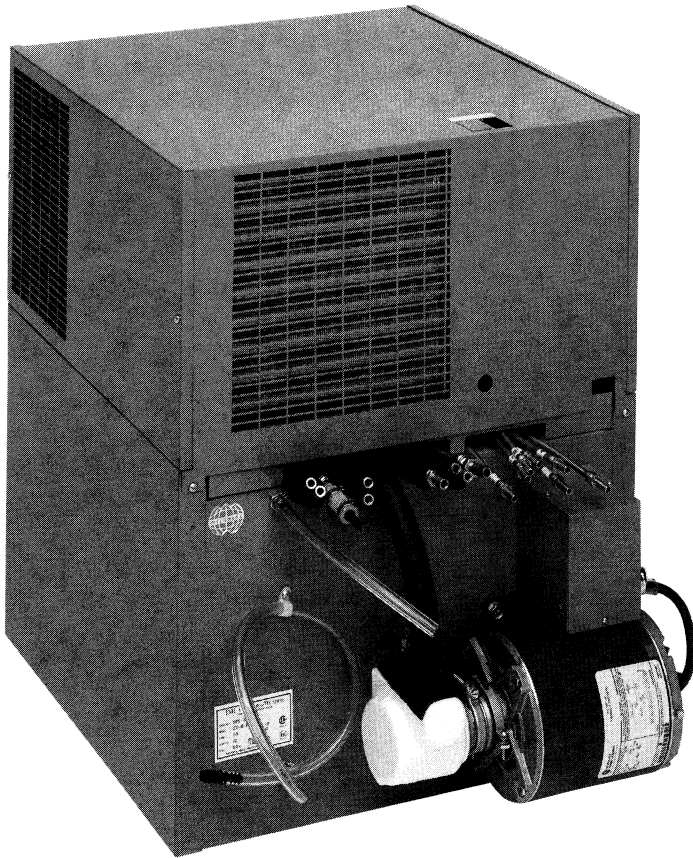

Features:

- 6 flavor capacity
- 40 lb. (18.14 kg.) ice bank
- 1/3 H.P. recirculating motor

Options:

- Built-in carbonator
- Available in export voltages
- 1/2 H.P. compressor



UC-40/UCC-40

Technical Specifications:

Dispenser:

Volts: 115 VAC - 60 Hz

Running amps: 12.0 UC-40 / 14.6 UCC-40

Agitator Motor: 15 Watt

Condenser fan motor: 5 Watt

Compressor: 1/2 H.P. – HFC-134a

Ice Bank Control: Mechanical

Initial Ice Bank 40 Series: 40 lbs. (18.2 kgs.)

Carbonator - UCC Units only

Motor: 1/3 H.P.

Pump Size: 100 GPH (380 LPH) 130 cu.in.

Tank size: 3.5" (8.9 cm) Dia. x 12.0" (30.5 cm) high, immersed in cold water bath.

Fittings

Inlet water: 3/8" (9.5mm) Barbed

Inlet syrup: 1/4" (6.4mm) Barbed

Weights:

Operating Weight UC-40: 222 lbs. (100.6 kgs.)

Operating Weight UCC-40: 241 lbs. (109.5 kgs.)

Shipping Weight UC-40: 127 lbs. (57.7 kgs.)


Shipping Weight UCC-40: 146 lbs. (66.4 kgs.)

Dimensions:

high: 24" (61.0 cm)

wide: 18 1/2" (47.0 cm)

deep: 18 1/2" (47.0 cm)

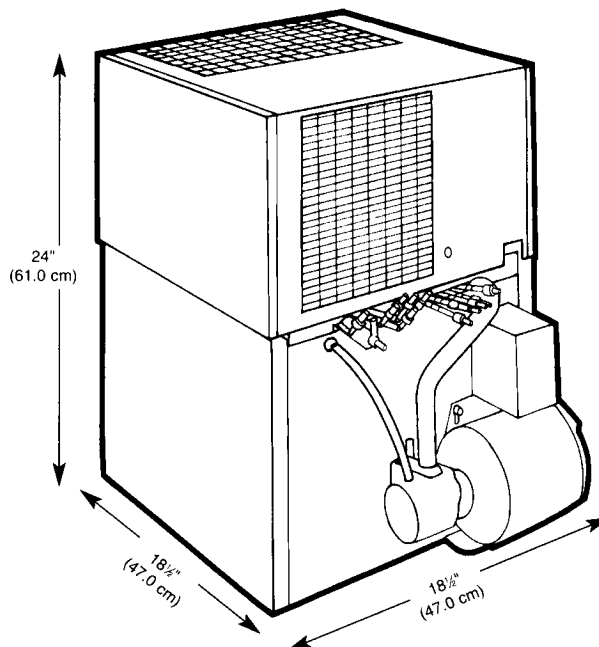

Agency Listings:



Part No.	Description
100022SG	UCR40 REMOT 06SYR 115/60 1/3
100022SR	UCR40 REMOT 06SYR 115/60 1/2
100049SG	UCCR40 REMOT 06SYR 115/60 1/3
100049SK	UCCR40 REMOT 06SYR 230/50 1/3
100049SM	UCCR40 REMOT 06SYR 230/50 1/3
110017SG	UCP40 PRECH 06SYR 115/60 1/3
561600069	UC20 PRECH 00Syrup 115/60 1/2



For more information or to place an order, contact your sales representative or authorized distributor.

In the US:

Phone: 1-800-238-3600

Fax: 1-800-535-4235

Outside the US:

Phone: 1-763-421-6120

Fax: 1-763-422-3297

IMI Cornelius Inc.

One Cornelius Place
Anoka, MN 55303-6234
USA