





## **UC-40 SERIES**

REMOTE COOLING UNITS

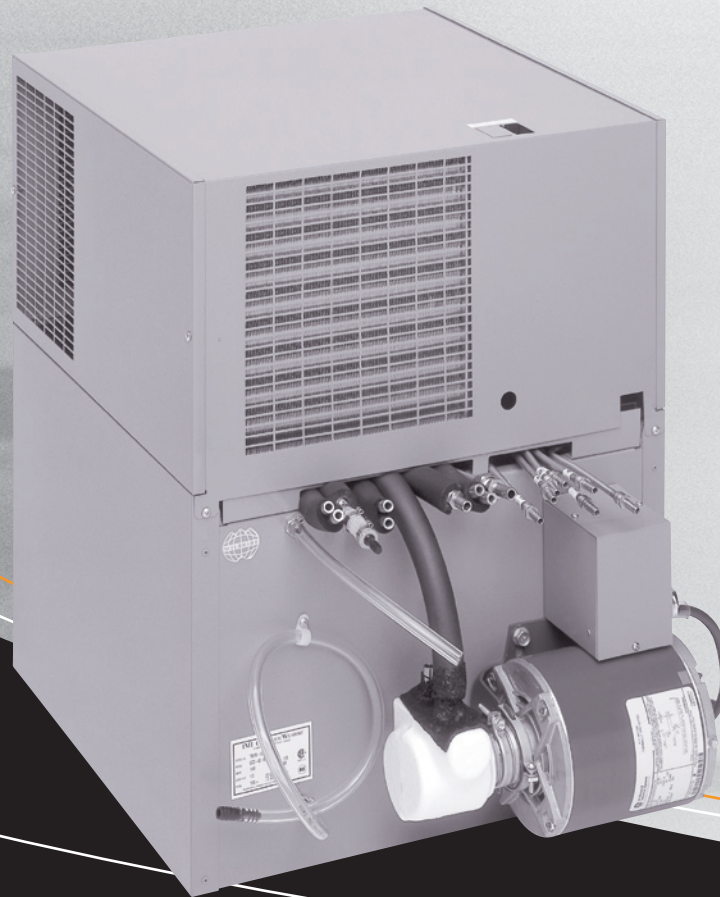

### **FEATURES:**

- 6-Flavor capacity (UCR, UCCR), 40 lb (18.14 kg) ice bank, 1/3 HP recirculating motor
- Options: built-in carbonator, export voltages
- Durable construction, compact footprint, reliable, efficient, & cost effective
- Environmentally friendly foam insulation
- Environmentally safe R134a refrigerant

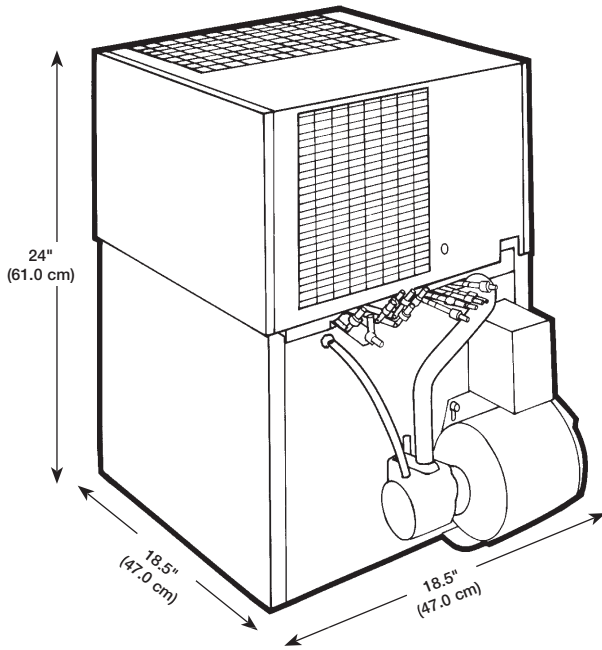

PART NUMBER	DESCRIPTION
100022SR	UCR-40 Remote
100049SG	UCCR-40 Remote
561600068	UCG-40 Remote, Glycol

## TECHNICAL SPECIFICATIONS:

### UC-40 AND UCC-40

DISPENSER:

VOLTS ..... 115 VAC – 60 Hz

RUNNING AMPS ..... 12 UC-40 / 14.6 UCC-40

AGITATOR MOTOR ..... 15 W

CONDENSER FAN MOTOR ..... 5 W

COMPRESSOR ..... 1/2 HP – HFC-134a

ICE BANK CONTROL ..... Mechanical Carbonator  
UCC units only

MOTOR ..... 1/3 HP

PUMP SIZE ..... 100 GPH (380 LPH)  
130 cu in

TANK SIZE ..... 3.5" (89 mm) Dia x 12.0"  
(305 mm) high immersed  
in cold water bath

FITTINGS INLET WATER ..... 3/8" (9.5 mm) barbed

FITTINGS INLET SYRUP ..... 1/4" (6.4 mm) barbed

OPERATING WEIGHT ..... UC-40 222 lb (100.6 kg)  
UCC-40 241 lb (109.5 kg)

SHIPPING WEIGHT ..... UC-40 127 lb (57.7 kg)  
UCC-40 146 lb (66.4 kg)

AGENCY LISTINGS .....



### UCG-40

COMPRESSOR ..... 1/2 HP

GLYCOL TANK CAPACITY ..... 11 gal (5 kg)

MOTOR ..... 1/3 HP

PUMP ..... 17 GPH

REFRIGERANT ..... R134a

ELECTRICAL RATING ..... 115 V / 60 Hz / 12 Amps

SHIPPING WEIGHT ..... 135 lb (61 kg)

AGENCY LISTING .....

