



QUEST ELITE 4000

4 FLAVOR POST-MIX
COLD COFFEE DISPENSER



FEATURES:

Wide product/ratio capability – Handles a wide range of post-mix products including juices with pulp, teas and cold coffees

Frost-free refrigeration compartment – Safely accommodates frozen, ambient or aseptic concentrate containers or BIB's

Large 14-16lb ice bank – Provides cold drinks during peak demand

Patented mixing system – Delivers consistent quality drinks with no stratification, slugging or dripping

LED illuminated graphics – Eliminates lost sales due to 'lights out' and reduces life costs


Narrow footprint – Conserves counter space

Easy to service – Modular component design and ease of access speeds service

'Sold out' indication – Alerts operator to product out condition and maximizes sales

Optional flush feature – Speeds maintenance and promotes product safety

High ratio capability – Optional high ratio platform handles up to 20 to 1 ratio for coffee and tea concentrates

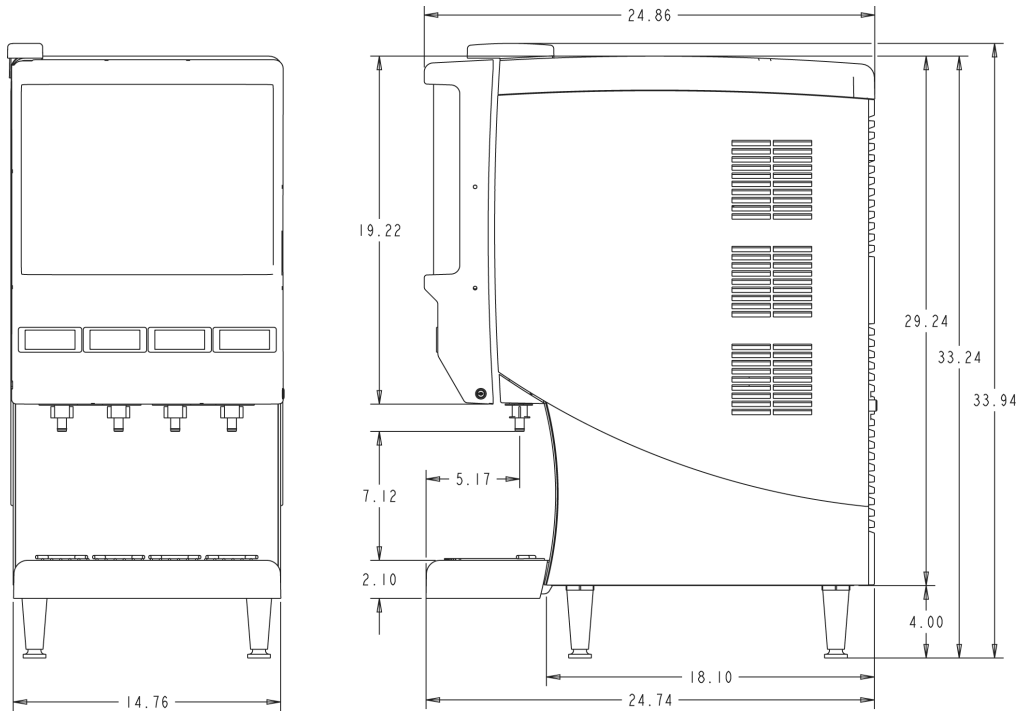

PART NUMBER	DESCRIPTION
721414101CC1	Quest Elite 4 Flavor, illuminated, flush, Push Button 115 V / 60 Hz with cold coffee graphics
729011003	Extended Panel Kit for Tall Cups
729011152	Cup Locator

TECHNICAL SPECIFICATIONS:

REFRIGERATION Hermetically sealed system, R-134a refrigerant 6.2 oz (190 g)

Ice bank 14-16 lb

CABINETRY High impact plastic cabinetry with stainless steel front panel

DISPENSER DIMENSIONS 29.3"H x 15"W x 24.3"D (74.4 cm x 37.5 cm x 61.7 cm)

WEIGHT Dry: 120 lb (54.4 kg)
Operating: 185 lb (83.9 kg)
Shipping: 135 lb (61.2 kg)

RECOMMENDED CLEARANCE Back: 4" (10.16 cm)
Top: 12" (30.48 cm)
Sides: 1" (2.54 cm)

WATER CONNECTION 0.375" (0.95 cm) SAE male flare SAE fitting on dispenser

CONCENTRATE STORAGE Four 3.5 L bottles

WATER SUPPLY REQUIREMENTS 50 psi (3.4 bar):
Recommended dynamic operating pressure
80 psi (5.15 bar):
Max static pressure
20 psi (1.38 bar):
Min dynamic pressure

COOLING Three 12 oz drinks/min (355 mL) @ 75°F (24°C) ambient, 75°F (24°C) incoming water, and 41°F (4°C) concentrate w/o exceeding a 40°F (4°C)

FLOW RATE Adjustable water flow rate from 1-2.2 oz/sec

Agency listings 